



# HP TouchSmart 15-r015dx Keyboard Replacement

This guide will show you how to replace your keyboard for your HP TouchSmart 15-r015dx.

Written By: Jacob Kleinsorge



## INTRODUCTION

The HP TouchSmart 15-r015dx has a Cruus NSK-CN6SC keyboard.

---

### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-



## Step 1 — Keyboard



- Turn off your laptop.

 Ensure your laptop is off. Removing the keyboard while it is on may harm your laptop.


- Flip upside down in order to release the keyboard.

## Step 2




- There is 1 (one) screw holding the keyboard in place. There is a 2nd screw on some located on the table.

- Use your screwdriver to remove the screw.

 Be careful not to lose the screw.


## Step 3

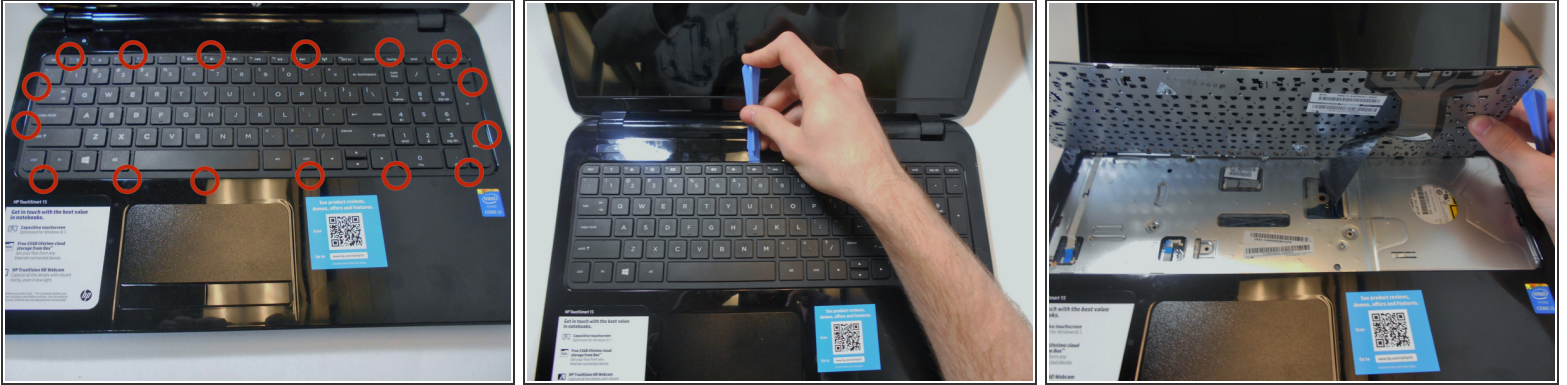

- Flip the laptop back over and pull the screen up.
- There are 16 (sixteen) latches holding the keyboard in place.
- Gently pry the keyboard up using your plastic opening tool.

⚠ Don't pull the keyboard up more than 2-3 inches as there is a film-material connecting the keyboard to the laptop.

## Step 4

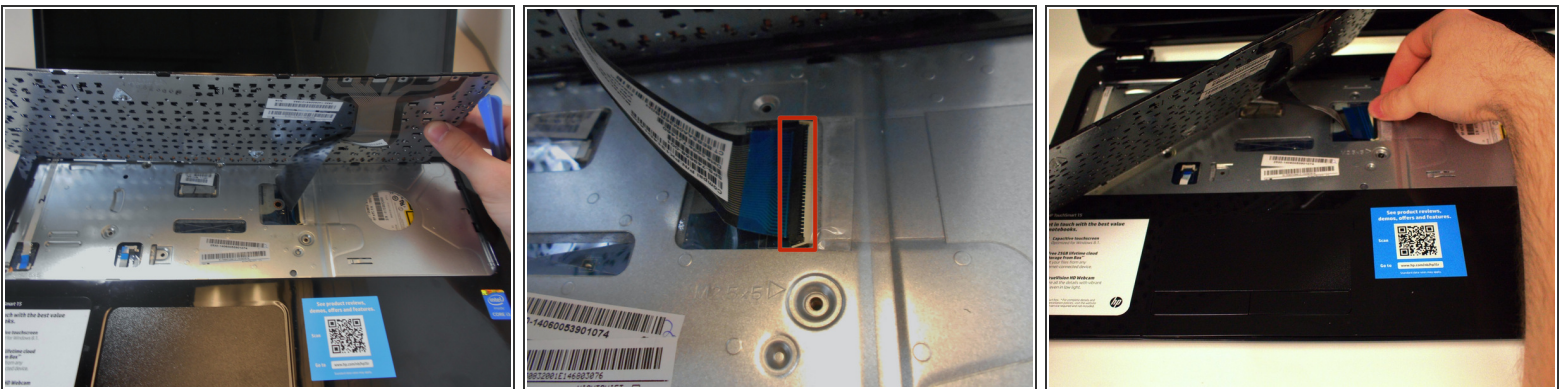

- There is a film-material connecting the laptop to the keyboard.
- There is a small black latch holding the film-material in place.
- Flip the black latch up to release the film-material.
- Once flipped up, simply pull the film-material out from the laptop to release the keyboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-05 11:51:04 PM.